



AVK FLANGED BEND. PN10/16

712/0110-001

11.25°



AVK's range of fittings comprises a wide selection of variants with socket and flange connection. The fittings are made of ductile iron GJS-500-7 and are fusion bonded epoxy coated in compliance with DIN 3476 part 1 and EN 14901, GSK specifications - internally and externally.



Product description:

Double flanged bend 11.25° type FFK to EN 545 for water, waste water and neutral liquids to max. 70° C

Standards:

- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN10/16

Test/Approvals:

- Approved according to ACS-France
- Belgaqua approved


Features:

- Ductile iron fitting to EN 545
- Body of GJS-500-7
- Fusion bonded epoxy coating in compliance with DIN 3476 part 1 and EN 14901, GSK guidelines internally and externally



Expect... **AVK**

The designs, materials and specifications shown are subject to change without notice. This is due to the continuous development of our product programme.

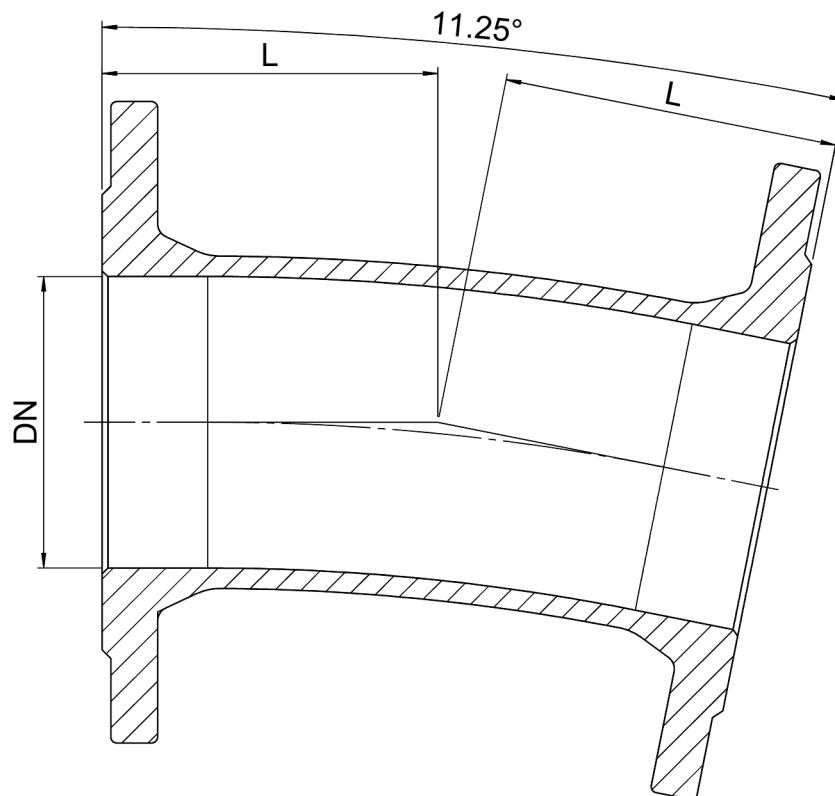

Component list:

1. Fitting	Ductile iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight/kg
712-0040-01-101	40	PN10/16	99	4.9
712-0050-01-101	50	PN10/16	109	6.1
712-0065-01-101	65	PN10/16	124	7.9
712-0080-01-101	80	PN10/16	113	9.1
712-0100-01-101	100	PN10/16	115	10
712-0125-01-101	125	PN10/16	111	13
712-0150-01-101	150	PN10/16	113	16
712-0200-01-100	200	PN10	132	23
712-0200-01-101	200	PN16	132	23
712-0250-01-100	250	PN10	165	35
712-0250-01-101	250	PN16	165	34
712-0300-01-100	300	PN10	175	47
712-0300-01-101	300	PN16	175	46
712-0350-01-100	350	PN10	191	58
712-0350-01-101	350	PN16	191	64
712-0400-01-100	400	PN10	205	71
712-0400-01-101	400	PN16	205	82
712-0500-01-100	500	PN10	135	80
712-0500-01-101	500	PN16	135	109
712-0600-01-100	600	PN10	174	121
712-0600-01-101	600	PN16	174	173