



AVK FLANGED BEND, PN10/16

712/0210-001

22.5°



AVK's range of fittings comprises a wide selection of variants with socket and flange connection. The fittings are made of ductile iron GJS-500-7 and are fusion bonded epoxy coated in compliance with DIN 3476 part 1 and EN 14901 and GSK specifications - internally and externally.



Product description:

Double flanged bend 22.5° type FFK to EN 545 for water, waste water and neutral liquids to max. 70° C

Standards:

- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN10/16

Test/Approvals:

- Approved according to ACS-France
- Belgaqua approved


Features:

- Ductile iron fitting to EN 545.
- Body of GJS-500-7.
- Fusion bonded epoxy coating in compliance with DIN 3476 part 1 and EN 14901, and GSK guidelines internally and externally.



Expect ... **AVK**

The designs, materials and specifications shown are subject to change without notice. This is due to the continuous development of our product programme.

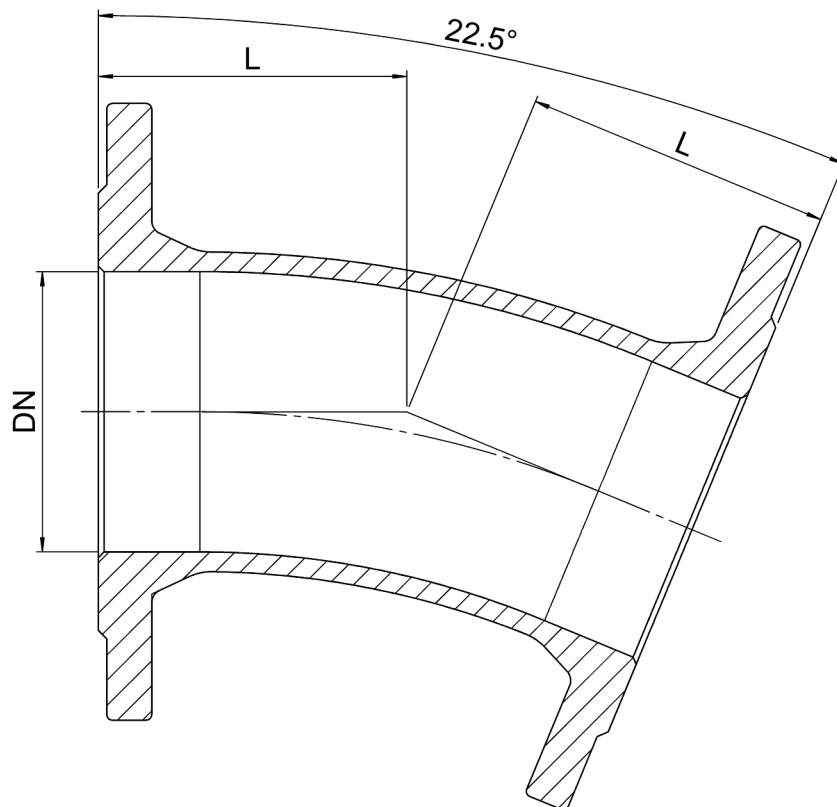

Component list:

1. Fitting	Ductile iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight/kg
712-0040-02-101	40	PN10/16	94	5.7
712-0050-02-101	50	PN10/16	104	7.1
712-0065-02-101	65	PN10/16	119	9.1
712-0080-02-101	80	PN10/16	105	8.4
712-0100-02-101	100	PN10/16	110	10
712-0125-02-101	125	PN10/16	105	15
712-0150-02-101	150	PN10/16	109	15
712-0200-02-100	200	PN10	131	23
712-0200-02-101	200	PN16	131	23
712-0250-02-100	250	PN10	190	37
712-0250-02-101	250	PN16	190	36
712-0300-02-100	300	PN10	210	51
712-0300-02-101	300	PN16	210	50
712-0350-02-100	350	PN10	210	84
712-0400-02-100	400	PN10	239	77
712-0400-02-101	400	PN16	239	110
712-0500-02-100	500	PN10	185	150
712-0500-02-101	500	PN16	185	150
712-0600-02-100	600	PN10	254	248
712-0600-02-101	600	PN16	254	248