



AVK FLANGED PIPE

712/5010-001

700 MM, PN 10/16



AVK's range of fittings comprises a wide selection of variants with socket and flange connection. The fittings are made of ductile iron GJS-500-7 and are epoxy coated according to DIN 3476 and GSK specifications - internally and externally.



Product description:

Double flange pipe type FF for water, waste water and neutral liquids to max. 70° C

Design standards:


- EN 545
- Flange drilling to EN1092, PN10/16

Features:

- Ductile iron fitting to EN 545
- Body of GJS-500-7
- Epoxy coated to DIN 3476 and GSK internally and externally



Expect ... **AVK**

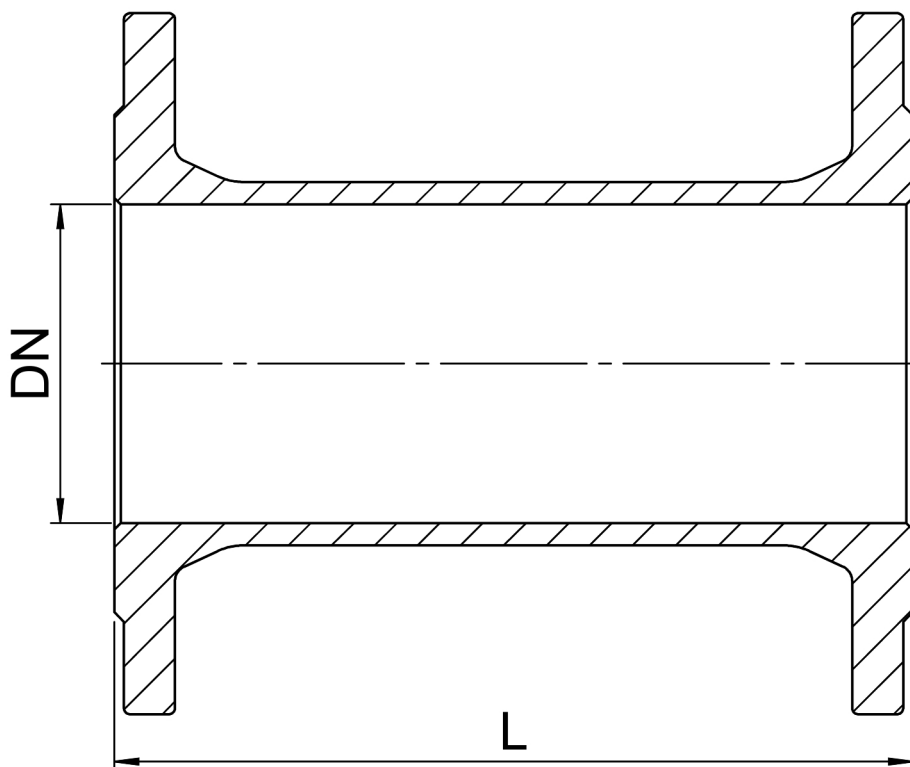

Component list:

1. Fitting	Ductile Iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight/kg
712-0040-50-101	40	PN10/16	700	8.3
712-0050-50-101	50	PN10/16	700	10
712-0060-50-101	60	PN10/16	700	12
712-0065-50-101	65	PN10/16	700	13
712-0080-50-101	80	PN10/16	700	15
712-0100-50-101	100	PN10/16	700	18
712-0125-50-101	125	PN10/16	700	23
712-0150-50-101	150	PN10/16	700	27
712-0200-50-100	200	PN10	700	38
712-0200-50-101	200	PN16	700	38
712-0250-50-100	250	PN10	700	52
712-0250-50-101	250	PN16	700	51
712-0300-50-100	300	PN10	700	67
712-0300-50-101	300	PN16	700	67
712-0350-50-100	350	PN10	700	83
712-0350-50-101	350	PN16	700	88
712-0400-50-100	400	PN10	700	102
712-0400-50-101	400	PN16	700	108
712-0450-50-100	450	PN10	700	118
712-0450-50-101	450	PN16	700	140
712-0500-50-100	500	PN10	700	134
712-0500-50-101	500	PN16	700	163
712-0600-50-100	600	PN10	700	179
712-0600-50-101	600	PN16	700	231

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product range.