



## AVK FLANGED PIPE PIPE W/WALL SLEEVE, PN 10/16

712/6010-001



AVK's range of fittings comprises a wide selection of variants with socket and flange connection. The fittings are made of ductile iron GJS-500-7 and are epoxy coated according to DIN 3476 and GSK specifications - internally and externally.



### Product description:

Flanged pipe with wall sleeve type FF-WP to EN 545 for water, waste water and neutral liquids to max. 70° C

### Design standards:

- EN 545
- Flange drilling to EN1092, PN10/16


### Features:

- Ductile iron fitting to EN 545
- Body of GJS-500-7
- Epoxy coated to DIN 3476 and GSK internally and externally



Expect ... **AVR**

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product range.

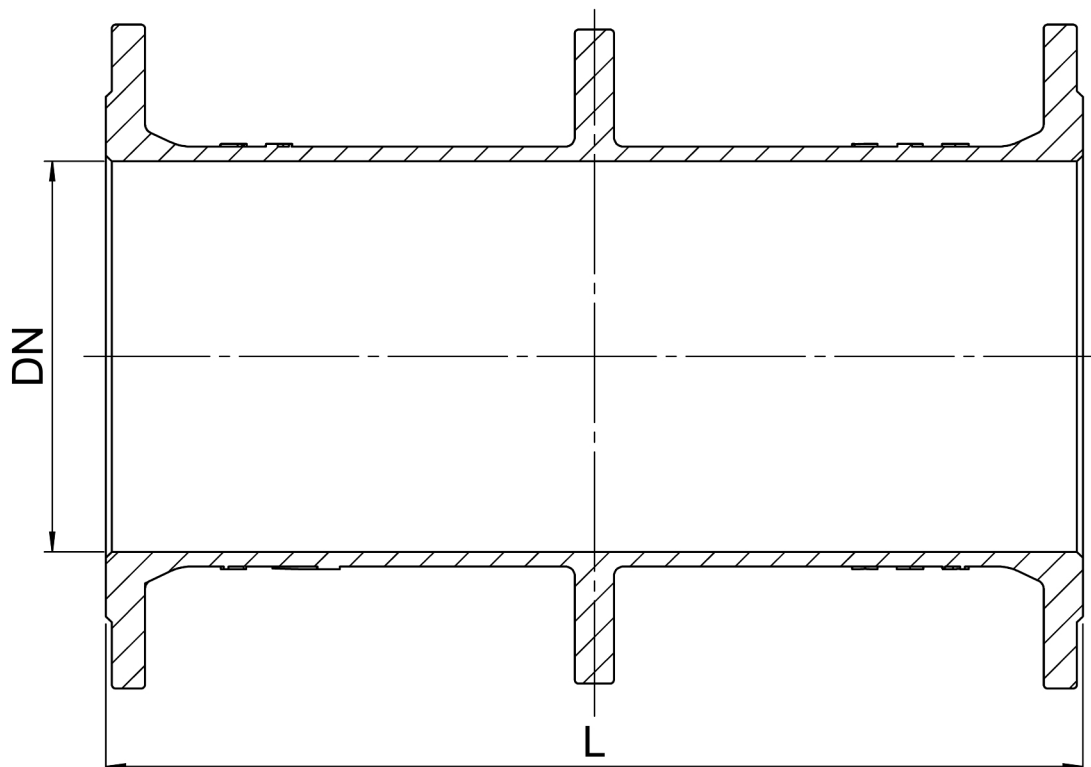

**Component list:**

1. Fitting	Ductile Iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

**Reference nos. and dimensions:**

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight/kg
712-0100-60-101	100	PN10/16	500	21
712-0150-60-101	150	PN10/16	500	28
712-0200-60-100	200	PN10	500	39
712-0200-60-101	200	PN16	500	41
712-0250-60-100	250	PN10	500	54
712-0250-60-101	250	PN16	500	53
712-0300-60-100	300	PN10	500	70
712-0300-60-101	300	PN16	500	70
712-0350-60-100	350	PN10	500	84
712-0350-60-101	350	PN16	500	93
712-0400-60-100	400	PN10	500	100
712-0400-60-101	400	PN16	500	116
712-0450-60-100	450	PN10	500	118
712-0450-60-101	450	PN16	500	149
712-0500-60-100	500	PN10	500	140
712-0500-60-101	500	PN16	500	181
712-0600-60-100	600	PN10	500	184
712-0600-60-101	600	PN16	500	262