



## AVK FLANGED PIPE PIPE W/WALL SLEEVE, PN 10/16

712/6110-001



AVK's range of fittings comprises a wide selection of variants with socket and flange connection. The fittings are made of ductile iron GJS-500-7 and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.



### Product description:


Flanged pipe with wall sleeve type FF-WP for water, waste water and neutral liquids to max. 70° C

### Design standards:


- EN 545
- Flange drilling to EN1092, PN10/16

### Features:

- Ductile iron fitting to EN 545
- Body of GJS-500-7
- Epoxy coated to DIN 3476 and GSK internally and externally

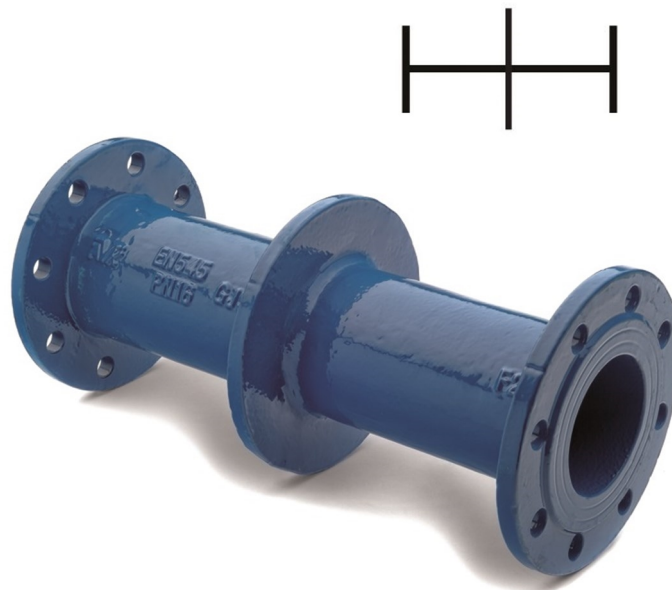

Expect ... **AVK**

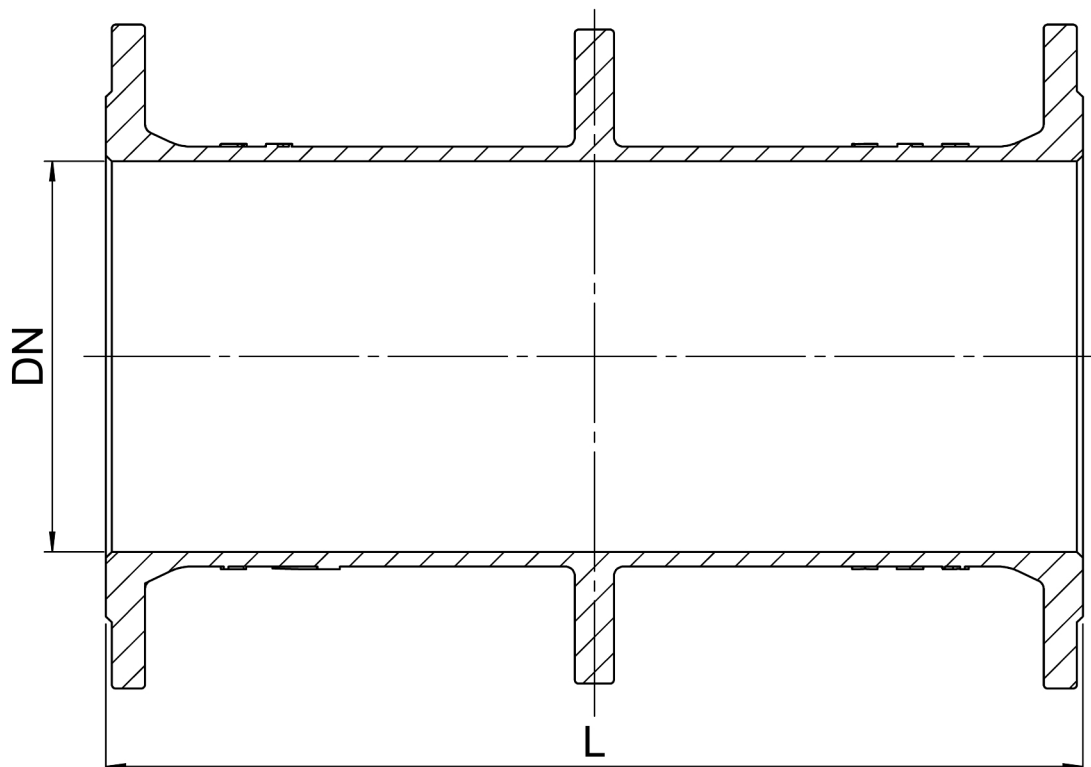

**Component list:**

1. Fitting	Ductile Iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

**Reference nos. and dimensions:**

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight/kg
712-0100-61-101	100	PN10/16	1000	31
712-0150-61-101	150	PN10/16	1000	40
712-0200-61-100	200	PN10	1000	56
712-0200-61-101	200	PN16	1000	56
712-0250-61-100	250	PN10	1000	76
712-0250-61-101	250	PN16	1000	76
712-0300-61-100	300	PN10	1000	99
712-0300-61-101	300	PN16	1000	99
712-0350-61-100	350	PN10	1000	122
712-0350-61-101	350	PN16	1000	131
712-0400-61-100	400	PN10	1000	148
712-0400-61-101	400	PN16	1000	161
712-0450-61-100	450	PN10	1000	172
712-0450-61-101	450	PN16	1000	203
712-0500-61-100	500	PN10	1000	203
712-0500-61-101	500	PN16	1000	244
712-0600-61-100	600	PN10	1000	265
712-0600-61-101	600	PN16	1000	344