



AVK FLANGE/SPIGOT

712/7513-001

PN 10/16



AVK's range of fittings comprises a wide selection of variants with socket and flange connection. The fittings are made of ductile iron GJS-500-7 and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.



Product description:

Flange spigot piece type F to EN 545 for water, waste water and neutral liquids to max. 70° C

Design standards:


- EN 545
- Flange drilling to EN1092, PN10/16

Test/Approvals:

- Belgaqua approved material

Features:


- Ductile iron fitting to EN 545
- Body of GJS-500-7
- Epoxy coated to DIN 3476 and GSK internally and externally

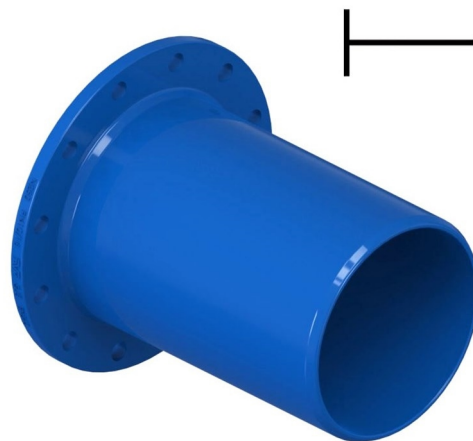

BELGAQUA

Expect... **AVK**

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product range.

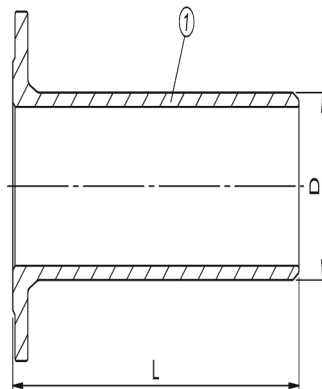

Component list:

1. Body	Ductile Iron
---------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Flange drilling	L mm	D mm	Theoretical weight/kg
712-0040-75-131	40	PN10/16	335	56	4.6
712-0050-75-131	50	PN10/16	340	66	5.6
712-0065-75-131	65	PN10/16	345	82	7.3
712-0080-75-131	80	PN10/16	350	98	7.7
712-0100-75-131	100	PN10/16	360	118	11
712-0125-75-131	125	PN16	370	144	14
712-0150-75-131	150	PN10/16	380	170	18
712-0200-75-130	200	PN10	400	222	27
712-0200-75-131	200	PN16	400	222	27
712-0250-75-130	250	PN10	420	274	38
712-0250-75-131	250	PN16	420	274	38
712-0300-75-130	300	PN10	440	326	51
712-0300-75-131	300	PN16	440	326	51
712-0350-75-130	350	PN10	460	378	65
712-0350-75-131	350	PN16	460	378	68
712-0400-75-130	400	PN10	480	429	79
712-0400-75-131	400	PN16	480	429	79
712-0500-75-130	500	PN10	520	532	115
712-0500-75-131	500	PN16	520	532	129
712-0600-75-130	600	PN10	560	635	162
712-0600-75-131	600	PN16	560	635	187