



Qualität von Anfang an.

## Teknisk data

### DESIGN

2 delad konstruktion

### Anslutning

Invändig gänga 1/4" ... 2", DIN 2999

### MONTERINGSLÄGE

Efter önskemål enligt flödesriktning.

### TRYCKOMRÅDE

max. 40bar

### TEMPERATUR

-20°C ... +150°C

### MATERIAL

Hus:	Rostfritt stål	1.4408
Lock:	Rostfritt stål	1.4408
Interna delar i metall:	Rostfritt stål	
Fjäder:	Rostfritt stål	1.4310
Tätningar:	PTFE	

Ovanstående information är endast avsedd som vägledning och företaget förbehåller sig rätten att ändra data utan föregående meddelande!

## Specification

### DESIGN

Body consists of two screwed parts

### CONNECTION

Female thread 1/4" ... 2", DIN 2999

### MOUNTING POSITION

As desired, please refer to flow direction.

### PRESSURE RANGE

max. 40bar

### TEMPERATURE RANGE

-20°C ... +150°C

### MATERIAL

Body:	Stainless steel	1.4408
Cover:	Stainless steel	1.4408
metallic inner parts:	Stainless steel	
Spring:	Stainless steel	1.4310
Seals:	PTFE	

The above information is intended for guidance only and the company reserves the right to change any data herein without prior notice!

Artikel:

**VB**

Kägelbackventil

PN40

Rostfritt stål



Type:

**VB**

Non-return valve

PN40

Stainless steel




**Förklaring artikelnummer:** T.ex. **VB310025**  
 = Kägelbackventil, Rostfritt stål / PTFE, 1" gängad anslutning

Siffror 1.+ 2. Produkt	Siffror 3.+ 4. Material Hus / Tätning	Siffror 5. Manöver/reglering	Siffror 6. Alternativ	Siffror 7. + 8. Anslutning
VB = Kägelbackventil	31 = Rostfritt stål / PTFE	0 = ingen	0 = inga tillval	21 = 1/4" 22 = 3/8" 23 = 1/2" 24 = 3/4" 25 = 1" 26 = 1 1/4" 27 = 1 1/2" 28 = 2"

**Ordering example:** e.G. **VB310025**  
 = Non-return valve, stainless steel / PTFE, 1"

1.+ 2. Digit Product	3.+ 4. Digit Material Body / Sealing	5. Digit Operation	6. Digit Options	7. + 8. Digit Connecting size
VB = Non-return valve	31 = Stainless steel / PTFE	0 = without	0 = no options	21 = 1/4" 22 = 3/8" 23 = 1/2" 24 = 3/4" 25 = 1" 26 = 1 1/4" 27 = 1 1/2" 28 = 2"

**Dimensioner / Dimensions:**

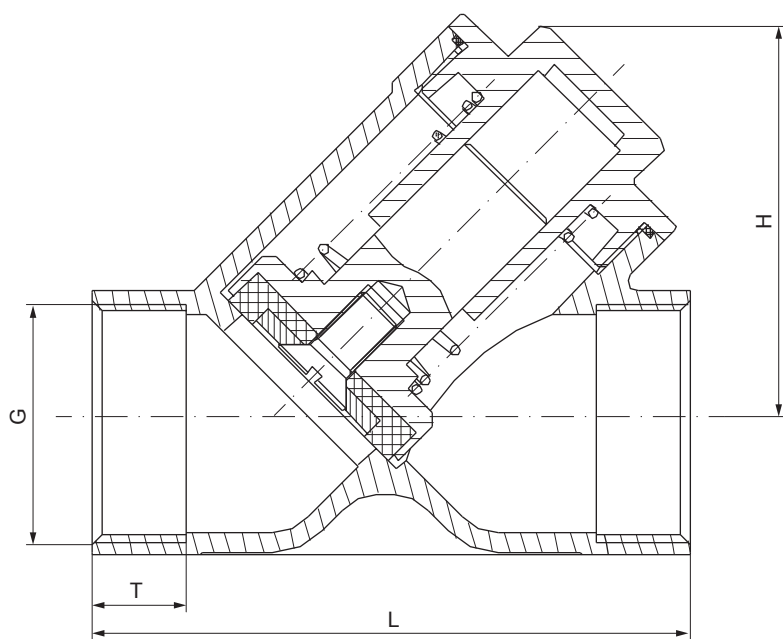

Storlek/ size	Öppningstryck/ opening pressure
1/4" - 3/8"	0,13bar
3/4"	0,11bar
1"	0,08bar
1 1/4"	0,05bar
1 1/4" - 2"	0,04bar

G	H	L	T
1/4"	37,8	56	13,5
3/8"	37,8	56	13,5
1/2"	44,7	65	14
3/4"	52,1	75	15
1"	65,7	90	17
1 1/4"	70	110	19
1 1/2"	79,5	120	19
2"	98,5	140	22